



## 12-Spindle Carousel SPECIFICATION

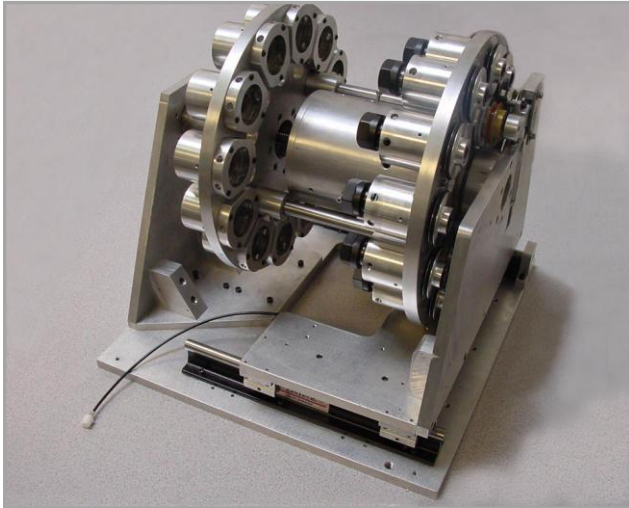

12 Spindle Carousel

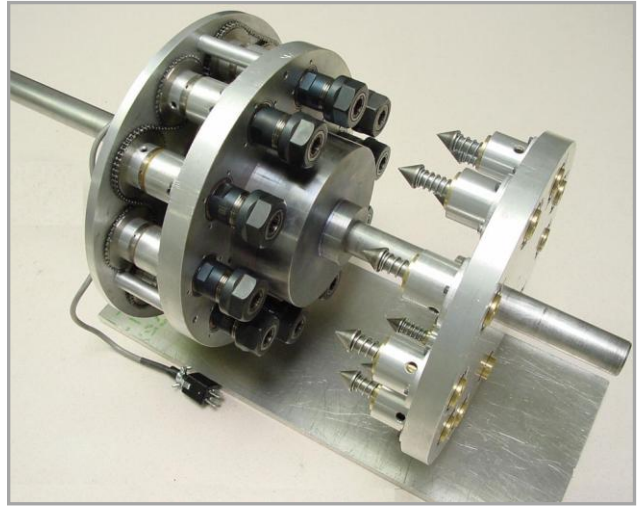

12 Spindle Carousel - with Tailstock

### General Description:

Our carousels are available in various sizes to fit a variety of parts and projects. The carousel for an 18" cubed or larger chamber typically has 12 spindles. Each spindle is fitted with collets with a capacity of up to 1/2" and the optional tailstock slides back and forth to adjust the tailstock spring pressure or to remove parts. Indexing is by stepper motor, and the spindle rotation has a wide speed range and is driven by a micro-stepper motor.

### SPECIFICATIONS

<b>Approximate Size</b>	12" Diameter
<b>Speed Range</b>	2 to 100 RPM with digital readout
<b>Drives</b>	Stepper motors
<b>Extra Options</b>	3 Jaw chucks, more or less spindles, larger or smaller diameter carousel plate, Tilt Angle
<b>Controller</b>	(Not Shown) Adjusts spindle speed and indexing